

# XD560U XD550U




XD560U/XD550U

Brilliant Color	Color Enhancer	Wall Screen	10W Speaker	USB / LAN Display	Remote Desktop
Stand-by Audio	Audio Mix	Computer Presentation	Visual PA	Direct Power Off	Long-life Lamp
Low Stand-by Power	Top Loading Lamp	LAN (RJ-45)	HDMI	Low Fan Noise	



Picture Performance Presentation User-friendly

## Input and Output Terminals (XD560U/XD550U)



- 1 Audio output
- 2 Audio input
- 3 S-Video/Video
- 4 Serial RS-232C
- 5 Monitor output
- 6 PC/Component video input
- 7 HDMI
- 8 USB
- 9 LAN (RJ-45)



## MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

# A Great Companion for Education or Business



### Specifications

Model	XD560U	XD550U
Display technology	0.55" 1-Chip DMD	
Resolution	1024 x 768 (Total 786,432 pixels)	
Brightness	3500lm	3000lm
Contrast ratio	3000 : 1	
Picture size	40" - 300"	
Throw ratio	1.4 - 2.3	
Source lamp	Normal Mode: 230W (Shut Off Time: 3000hrs), Low Mode: 190W (Shut Off Time: 6000hrs)	
PC compatibility	1024 x 768 - 1600 x 1200, 1080p Sync on Green available	
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i/p (1125i/p 60Hz) 1080i/p (1125i/p 50Hz)	
Input terminals	RGB; mini D-sub 15pin x 2 Audio; Stereo mini jack (ø3.5mm) x 2 (one for PC1, another one for PC2) Video; RCA x 1 + S-VIDEO x 1 Digital; HDMI x 1 Video Audio; RCA jack (LR) x 1	
Output terminals	RGB; mini D-sub 15pin x 1 Audio; Stereo mini jack (ø3.5mm) x 1	
Communication terminal	SERIAL; mini D-sub 9pin x 1 (RS232C) LAN (RJ-45); x 1 (Projector control, LAN Display) USB type-A; Wireless Display, Computer-free Presentation USB type-B; USB Display	
Audio speaker	10W Mono	
Dimensions (W x H x D)	325 x 113 x 258 mm	
Weight	3.5 kg (7.7 lbs)	
Power requirements	AC 100 - 240V, 50/60Hz	
Optional lamp	VLT-XD560LP	

\* Compliance with ISO21118-2005


**Varies depended on condition:**  
 \*Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours.  
 Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual.  
 \*HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.  
 \*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

### Dimensions



### Screen Size and Projection Distance

Side view



#### Screen size chart (XD560U/XD550U)

Diagonal size	Screen (4:3)				Distance from screen (L)						
	Width (W)	Height (H)	Shortest (Wide)	Longest (Tele)	Height projected image (Hd)						
40	102	32	81	24	61	45	1.1	73	1.9	3.6	9
60	152	48	122	36	91	67	1.7	110	2.8	5.4	14
80	203	64	163	48	122	90	2.3	148	3.8	7.2	18
100	254	80	203	60	152	113	2.9	185	4.7	9.0	23
120	305	96	244	72	183	136	3.4	222	5.6	10.8	27
150	381	120	305	90	229	170	4.3	278	7.1	13.5	34
200	508	160	406	120	305	227	5.8	371	9.4	18.0	46
250	635	200	508	150	381	284	7.2	—	—	22.5	57
300	762	240	610	180	457	341	8.7	—	—	27.0	69

The above numbers are approximate, and may be slightly different from the actual measurements.

# XD560U XD550U



## MITSUBISHI ELECTRIC AUSTRALIA PTY LTD

348 Victoria Rd Rydalmere, NSW 2116 Phone: (02) 9684 7777 Fax: (02) 9684 7208

To find out more about XD560U/XD550U and our projectors, visit us at

[www.MitsubishiElectric.com.au](http://www.MitsubishiElectric.com.au)

# High Resolution, High Contrast & Long-life Lamp Plus a User-friendly Display for Enhanced Convenience

The XD560U and XD550U create a new intermediate category in Mitsubishi Electric's line-up of high-performance portable projectors. Placing a focus on greater operation ease, an advanced user-friendly display has been newly added to ensure convenience and simplicity when giving presentations.

Other unique features include USB and Internet ports for trouble-free, direct connection to video sources, making these projectors ideal for use in classrooms and meeting rooms.




## XD560U XD550U

## Manufacturing Products that Minimise Environmental Impact

### Ecology

#### 6000-hour Long-life Lamp (max. use set to Low mode)

A longer service life for the projection lamp has been achieved by incorporating an optimal design for lamp temperature control. Benefits include substantial reductions in projector operating costs and the labour required for changing the lamp.



\*Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual.

#### Auto Power Off

If no image signal is detected for a predetermined period of time\*, power is automatically turned off, for greater energy savings and reduced power consumption.

\*Time preset by user

#### Stand-by Wattage under 0.5W\*

Stand-by (low) mode power consumption is less than 0.5W, offering increased energy savings and further contributing to environmental preservation.


\*When in stand-by (low) mode. At this time, use of the LAN function, RS-232C output is not possible.



### Presentation

#### 3500lm High Brightness (XD560U)

\*XD550U: 3000lm  
The high 3500lm brightness (3000lm for XD550U) helps to ensure presentation images are clearly seen without lowering the light in the room.



\*Image brightness comparison

#### 3000:1 High Contrast

DarkChip3™ is newly introduced to the DLP™ chip line-up. Stray-light processing has been optimised for a high contrast of 3000:1, making it possible to reproduce sharp, vivid images in which sentences and other characters can be easily read.


#### 3D READY – Enjoy the future today



### User Friendly

#### Ultra Quiet 28dB Operation

Projector fan noise can be distracting during a presentation or videoconference. The XD560U and XD550U projectors operate at a significantly low noise level of only 28dB (i.e., in "low lamp" mode). As a result, presentations and conferences can be held without distracting projector noise in the background.




#### Top-loading lamp for easier maintenance



### Network

#### USB Display/LAN Display

When using the projector to reproduce images from a computer, a VGA cable, USB cable, LAN cable or commercially available wireless dongle can be used. For displaying images via a LAN, up to four computers can be connected to one projector. The projection screen can be divided into quarters, reproducing all computer screens simultaneously.

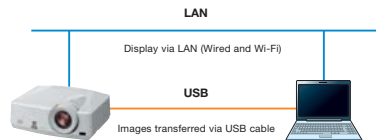


Notes:

- 1) Only one optional USB Type-A port from a computer can be directly connected to a projector. Multiple connections using a USB hub is not possible.
- 2) For displaying images via a LAN, network settings are required.
- 3) Not all USB dongles are compatible.

#### Remote Desktop

When using the LAN Display function, a USB mouse or USB keyboard can be connected to the projector enabling direct access to a computer utilising the Internet or other application.

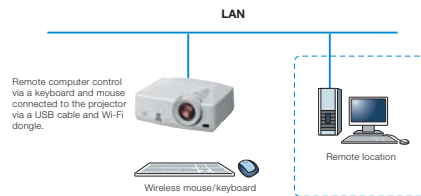


### Computer-free Presentations (PTG file/JPEG Viewer)

Using "PTG Converter", PowerPoint files can be converted into a special format and saved on a USB storage device. When the USB device is connected to the projector, users can replay slideshows or animation effects using only the projector.

Note: The types of slideshows and animation effects that can be replayed are limited.

JPEG files saved on a USB storage device can be projected in slideshow style.

Note: Only compatible with JPEG files.

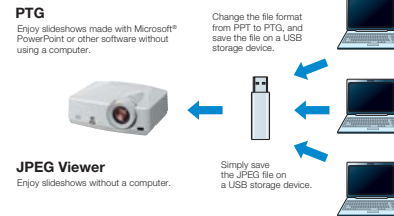

### Simultaneous Message Display (Visual PA)

Using a control room computer equipped with projector-control software, administrators can simultaneously send messages (up to 390 characters long) in real-time to projectors connected to the LAN. Ideal for broadcasting important information to multiple rooms in a school or building.



### Network Connectivity

Projectors are equipped with a RJ-45 LAN terminal for remote operation. Additionally, when used with Crestron® Room View®, integrated control of up to 250 projectors including power on/off control, message display and confirmation of lamp service hours is possible using RoomView™/e-Control™. Both projectors are equipped with AMX Device Discovery for simplified device management and are compatible with PJLink™.


PJ Link is a registered trademark or trademark registration has been submitted in Japan, the United States and other countries/regions.



### Audio

#### Stand-by Audio/Audio Pass-through

When the projector is in stand-by mode, its 10W speaker can still be used. Additionally, while in stand-by mode, an external speaker can be used by connecting it via the Audio Out terminal.

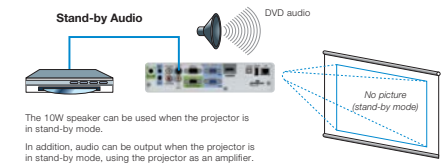

### Excellent Sound Projection (10W Speaker+Audio Mix)

A high-volume 10W speaker is built-in, eliminating the need for an external speaker. Using the "Audio Mix" feature and wireless microphone sold separately, the presenter's voice is reproduced loud and clear in real time.

\*Only compatible with stereo mini-jack. Not compatible with RCA jack (L/R) or HDMI. \*\*10W speaker and external speaker cannot be used at the same time.

